

# OILWIND BAITING SYSTEM

Baiting system for bent hooks no10 or no11

TYPE 27-03



- The bait is hooked, as the line runs out into the sea at a speed of 5-8 knots. The bait is lead through a narrowing, where the hooks penetrate the center of the bait.
- The type of bait used so far is common northern buccinum, Iceland-cyprina, squid, mackerel and (sauri). These are the types tested on the system but other types of bait can be used.
- For safety purposes the hooks are lead through the system from the magazine and over the stern without handling.
- The line is never in contact with the bait and is therefore always clean of bait.
- The unit suited for vessels from 26 to 56 feet (8 to 17 meters).

**Type: 27-03**

Min. water flow: .. 30 liters/min.  
Setting speed:..... 5-8 knots

**Weight:** ..... 50 kg

## OILWIND


Pf. J. K. JOENSEN & SONUR

P.O. BOX 9  
FO-370 MIÐVÁGUR  
FØROYAR  
(Faroe Islands)

Tlf: +298 332 422  
Fax: +298 333 222  
e-mail: oilwind@oilwind.fo  
http:// www.oilwind.fo

# OILWIND Longlinesystem Coiler-Sideroller-Washer-Stripper-Racking

TYPE 07-17

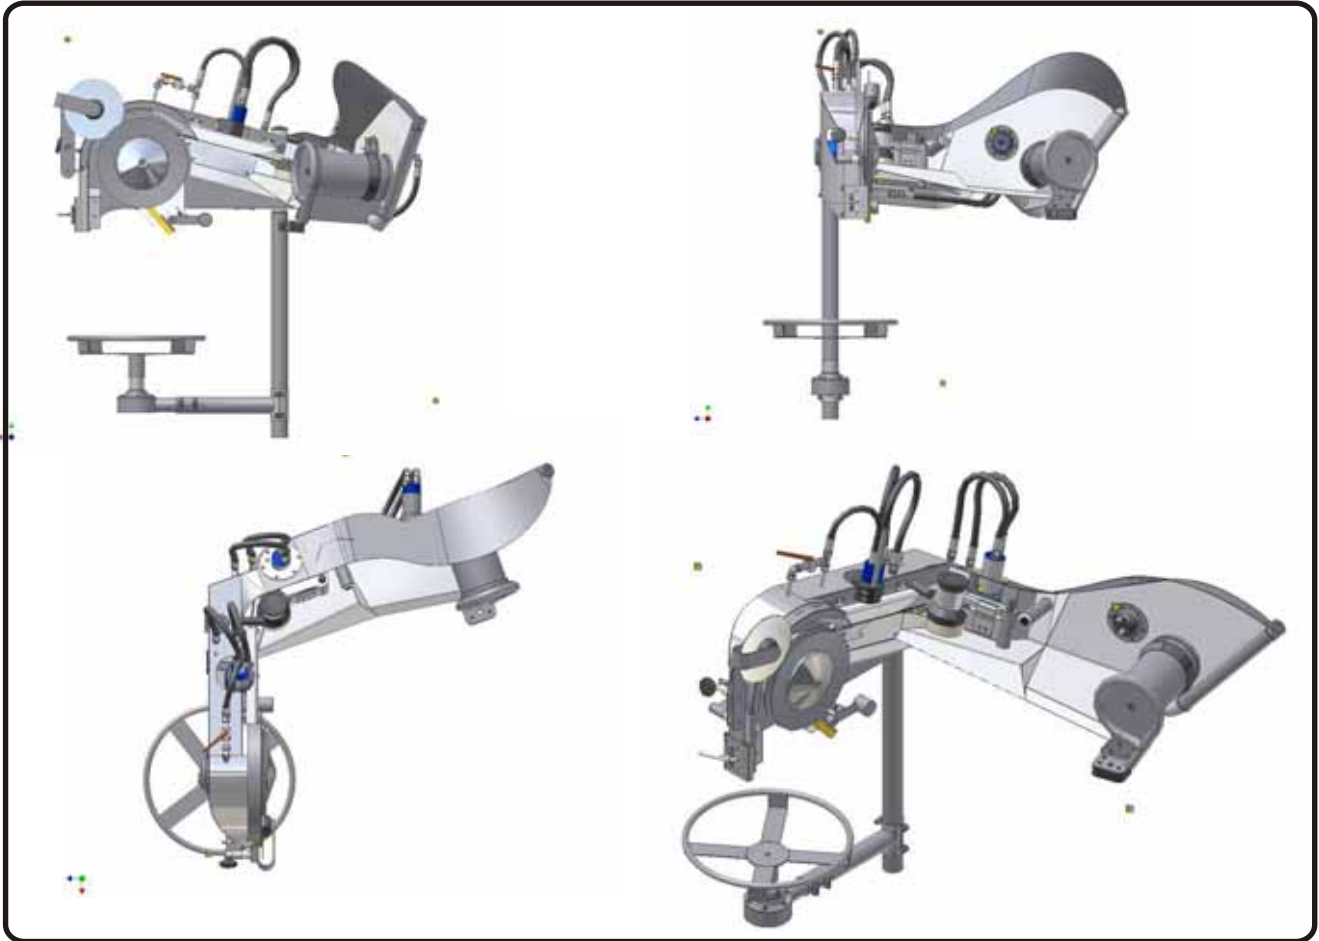

- The unit is hydraulic driven, and the sheaves are mounted directly on the hydraulic motor.
- All parts are made of stainless steel and plastic.
- The winch is equipped with two rotating brushes that keep the hooks and line in a clean condition.
- The winch is also equipped with a stripper, coiler and a racking system, that makes sure, the hooks are properly stored into the magazines.
- Operating the system is easy, and maintenance is very low.

## Data:

Type: 07-17

Pull/Speed on sheaves: ..	250kg / 94 m. per min.
Hydraulic pressure: .....	134 bar
Hydraulic flow: .....	25 liter per min.
Water required:.....	30 liter per min.

Weight: ..... approx. 109kg

# OILWIND

Pf. J. K. JOENSEN & SONUR

P.O. BOX 9  
FO-370 MIÐVÁGUR  
FØROYAR  
(Faroe Islands)

Tlf: +298 332 422  
Fax: +298 333 222  
e-mail: oilwind@oilwind.fo  
http:// www.oilwind.fo